


# 2x16 900um Mini PLC Splitter Datasheet

Widely used in passive optical networks to support multiple users sharing a single PON interface.

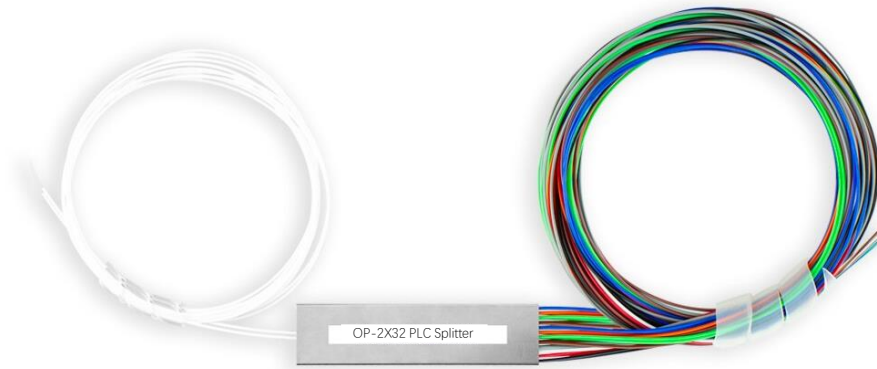


## • Description

Planar lightwave circuit (PLC) splitter is a type of optical power management device that is fabricated using silica optical waveguide technology to distribute optical signals from Central Office (CO) to multiple premise locations. OPTICO full arrange PLC Splitters feature small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

## • Features

- Low insertion loss and high return loss
- Very low PDL
- High reliability and stability
- 2000 hours' reliability
- Connector can up to grade B
- 100% 3D tested by Daisi and Sumix
- High-low temperature cycle test
- 100% tested before delivery
- FTTH Cabling solution could be design

## • Transmission Drawing(Unit: mm)

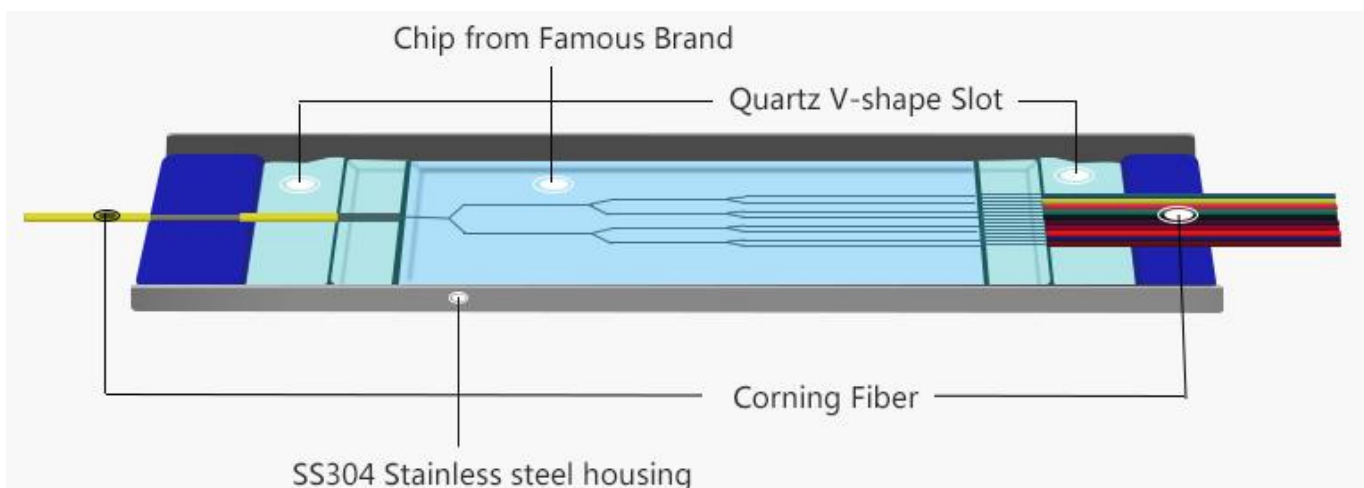

• Specifications:

Item	2x32 Mini Type PLC Splitter
Operating Wavelength(nm)	1260~1650
Fiber Type	G657A2 or as customized
Insertion loss(dB)	≤17.2
Loss Uniformity(dB)	2.5
Polarization Dependent Loss(dB)	0.4
Return Loss(dB)	≥55
Directivity(dB)	≥55
Wavelength Dependent Loss(dB)	0.1.0
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-40~+85
Fiber Length(m)	As customized
Connector Type	as customized
Package Size	6x20x80mm

Note:

1. Specified without connectors
2. Add an additional 0.2dB loss including connectors

• Tips:

Due to the COVID-19, sorry that you and our team couldn't visit face to face with each other. In order to make the customers know us more, please visit our VR factory, it is just like you were really standing in our factory.

OPTICO Fiber Assemblies Production Line VR :<https://www.linked-reality.com/company/15555/en>